


THERMAL/THERMAL TRANSFER BAR CODE PRINTER

RING 8012 PMH

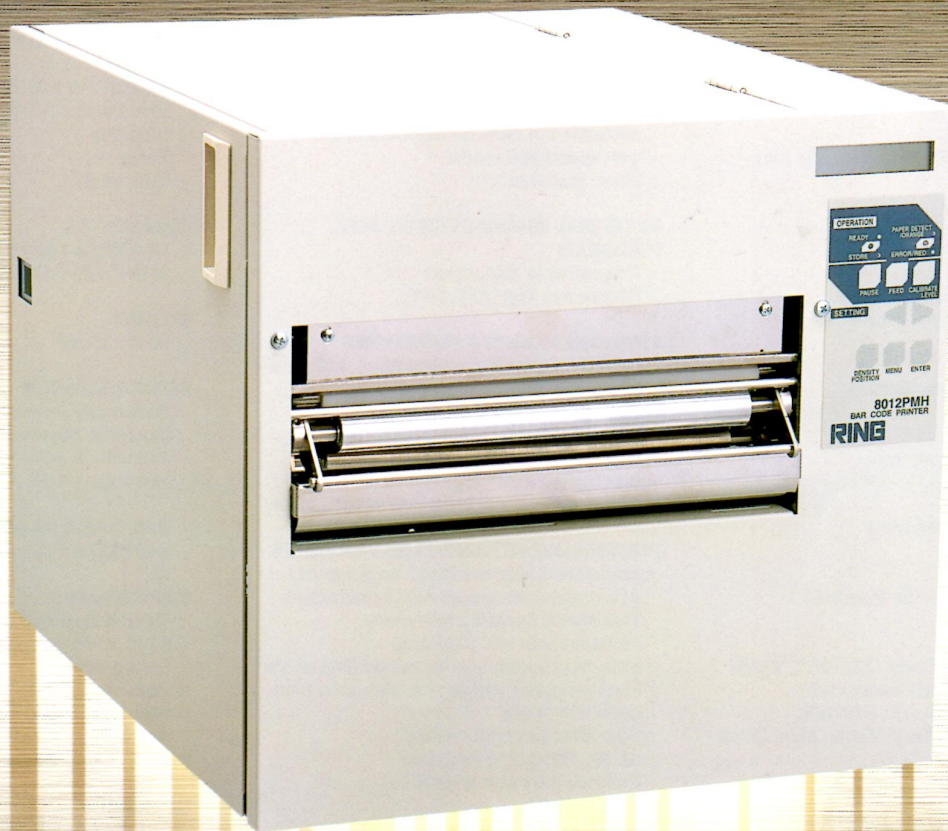

HIGH PERFORMANCE

HEAVY DUTY WIDE PRINTER

- HIGH PERFORMANCE, RELIABLE AND DURABLE
- RIDGED STEEL CABINET
- 8.5 INCH WIDE 300DPI, 6 INCH/SEC.
- HIGH SPEED PROCESSING BY 32 BIT RISC CPU
- 16MB SDRAM & 4MB FLASH MEMORY
- PEEL OFF MODE AS STANDARD
- LABEL MAKING SOFTWARE & WINDOWS DRIVERS
- VARIOUS OPTIONS

RING 8012PMH SPECIFICATIONS

PRINT METHOD

- Thermal Transfer/Direct Thermal
- Harmonic (History Control Print head)

MEDIA TYPE

- Die cut labels
- Butt cut labels tags
- Tag stock
- Roll stock (continuous s/o die cuts)
- Fan Fold

PRINT WIDTH

- 8.6" / 219 mm

MEDIA WIDTH

- 4" / 100 mm to 8.8"/226 mm

MEDIA THICKNESS

- .0025" to .0100" / .0635 mm to .254 mm

CABINET

- All steel cabinet

LABEL ROLL

- 9" / 220 mm maximum diameter
(6" / 150 mm max for I. Rewinder)

RIBBON ROLL

- 3" / 85 mm maximum diameter

DOT RESOLUTION

- 300 DPI / 11.8 Dot per mm

PRINT LENGTH

- 8.6" * 25.5" (219 * 650 mm)

PRINT SPEED

- 1"- 6"/sec. (15 mm – 150 mm/sec.)

BAR CODE

- Code 39, Code 93, Code 128, NW7, 2 of 5 (Industrial, Matrix and interleaved), EAN-JAN 13/8, UPC-A/E, EAN128 QR Code, PDF417, Data Matrix, Maxi Code

MEMORY

- 16MB SDRAM
- 4MB Flash memory
(Up to 16MB as option)

LCD DISPLAY

- 2 lines by 16 characters (Alpha / Numeric)
- Back Light

SENSORS

- Ribbon sensor (Reflective method)
- Label sensor (Transmit method)
- Home position
(Transmit-Auto calibration method)
(Reflective sensor as option)

SOFTWARE

- ALL Label
(Dynamic 32 bit Windows software)
- Windows Drivers

FONT-CHARACTER SIZE IN DOTS

- 8 Character Sets (Alpha/Numeric and symbols) 8*8, 12*12, 16*16, 16*24, 24*24, 24*26, 32*40, 48*60
Expansion is 1-10 and 16 times
(Both directions)
- 5-OCRB Character Sets
(4 Numeric and 1 Alpha/Numeric)
Numeric – 16*18, 24*27, 32*36 and 40*45
Alpha/Numeric – 32*32
NOTE : Should Not Expand
- Scalable Smooth Fonts (Bitstream Swiss 721) Programmable
32-720 Dot width
32-720 Dot length
Italic Slant Programmable 10, 15 and 20 degrees. NOTE : 8-31 Dots printing is available but must be matched properly with speed and media
- Down loadable font

EXTERNAL CHARACTER BY DOT PROGRAM

- Programable Expansion
Characters 256 (24X, 24Y)

PRINTING MODES & FUNCTIONS

- Peel off, Tear off (demand type) with label back feed for top of label printing.
- Batch printing (strip-for continuous printing of labels. Can be used with optional External Rewinder)
- Butt cut label printing
(Requires optional back side mark sensor)

PROGRAMMING LANGUAGE FEATURES

- Advanced Label marking Language-ALL
- ALL commands are all ASCII characters.
This allows flexibility with many environments and platforms
- Easy to program and format printing areas
- Pixel programming allows expanded area of up to 4 times
- Four direction print rotation
(0, 90, 180 & 270 degrees)
- Reverse print and area fill in
- Mirror print
- Half Tones
- Lines, dotted lines, angle lines and boxes
- Bit image data transfer and printing
- Down loadable graphics, text, font and formats to optional memory card
- Character Set (Code page)table
- Serializing (Numeric)
- Time and date (OPT)
- Communication and print functions

ERROR INDICATORS

- Label / Ribbon empty
- Head open
- Communication
- Grammatical
- Parameter
(Each error is notified by buzzer and LCD)

ADJUSTABLE PRINT FUNCTIONS SELECTABLE THROUGH FRONT PANEL OR BY SOFTWARE

- Print Speed / Energy Settings
- Print Density
- Label Print Position
- Cutting Position
- Thermal Transfer / Direct Thermal
- Test Printing
- Ready / Pause

COMMUNICATION INTERFACE- SELECTABLE THROUGH FRONT PANEL OR BY SOFTWARE

- Parallel
- RS-232 / to 115,200 baud rate
Line Control-RS-CS, XON-XOFF, ER-DR
Stop Bits
Parity
Data length

DIMENSIONS

- 14.3"W*13.1"H*16.9"D
365W*335H*430 mm

WEIGHT

- 50 lb / 23 kg

POWER SOURCE

- Switchable Power Supply
Industrial Standard
115 volts +-10% AC 50/60 HZ
240 volts +-10% AC 50/60 HZ

Built to UL/CSA safety standard
and FCC emissions standards.

Environmental

- Operating temperature
41 to 104 Fahrenheit / 5 to 40
Centigrade
- Relative humidity below 85%
Non-condensing
- Ventilation : Air Movement
- Dust : Non-Conducting, Non-Corrosive

OPTIONS

- Cutter (For thin label)
- Cutter (For thick label)
- Reflective Sensor
- Print Format Resister
- Font memory (8, 12, 16MB)
- Internal Rewinder
- LAN Interface
100 Base -TX/10Base-T
(TCP/IP Protocol)
- USB

APPROVALS

- FCC Class A ; U/L ; TÜV ; CE

THE ABOVE IS FOR INFORMATION ONLY.

Autonics Company limited reserves the right
to change specifications without notice.
Bit stream is a registered trademark of
Bit stream Inc.

Autonics Co., Ltd.
4-14-26 Shimomuneoka Shiki-shi
Saitama 3530008 Japan

